

AFCO Installation & Operation Instructions

Model #AF 950600 •394 Blast Fogger

REQUIREMENTS

Ready-to-Use Chemical Solution

Compressed Air	13.0 CFM @ 80 PSI
Minimum Air Supply Line	3/8"

OPTIONS

Stainless Steel Jug Racks

1 Gallon Round/Square	# 224200
1 Gallon Round/Square Locking	# 224200-L
2 ½ Gallon (8 ½" x 10 ½")	# 224210
5 Gallon (12" x 12")	# 224215
5 Gallon Round Locking	# 224216

To Control Solution Flow (Wetness of Fog)

Metering Tips-Color Coded (Set of 20)	# 443798
---------------------------------------	----------

WEIGHT & DIMENSIONS

Shipping Weight: 2 lbs.

Shipping Dimensions: 15" x 8" x 5"



<http://www.afcocare.com>

**READ ALL
INSTRUCTIONS BEFORE
USING EQUIPMENT!**

Overview

The 394 Blast Fogger is a hand-held chemical applicator that uses compressed air (13 CFM @ 80 PSI) to draw pre-diluted chemical solution from any container and project it as a strong, wet blast.

AFCO • 5000 Letterkenny Rd • Chambersburg, PA. 17201 • 1-800-345-1329



Safety & Operational Precautions

- Manufacturer assumes no liability for the use or misuse of this unit.
- Wear proper respiratory protection, protective clothing, gloves and eye-wear when working with chemicals.
- Always direct the discharge away from electrical devices.
- Follow the chemical manufacturer's safe handling instructions.
- NEVER fog flammable materials through the fogger.
- **SPECIAL CAUTION: This fogger atomizes chemical into the air. Ensure that the area to be fogged has been evacuated of all people without proper respiratory protection!**

TO INSTALL (REFER TO DIAGRAM, NEXT PAGE.)

Hand Held

1. Mix up a ready to use chemical solution.
2. Connect a compressed airline to the fogger.
3. Place the pick up tube W/ strainer in the solution.

TO OPERATE

SPECIAL CAUTION: This fogger atomizes chemical into the air. Ensure that the area to be fogged has been evacuated of all people without proper respiratory protection! Upon completion of fogging, ensure that sufficient time has elapsed for all the fog to have dissipated before returning to the area without proper respiratory protection.

Hand Held

1. Direct fogger towards the area or object to be fogged and turn the ball valve on / depress thumb gun.
2. When finished close the ball valve / release thumb gun.

Foggers may produce more volume than needed. If fog is too dense, optional metering tips are available for restricting the solution volume to produce a lighter fog.

394 Fogger

Delivers a strong blast
of chemical

COMPRESSED AIR FLOW IN CFM


MODEL	60 PSI	80 PSI
HAND HELD	10	13

CHEMICAL SOLUTION

DRAW RATE

Average ounces of chemical solution per minute the fogger will draw

MODEL	60 PSI	80 PSI
HAND HELD	32.4	32.0

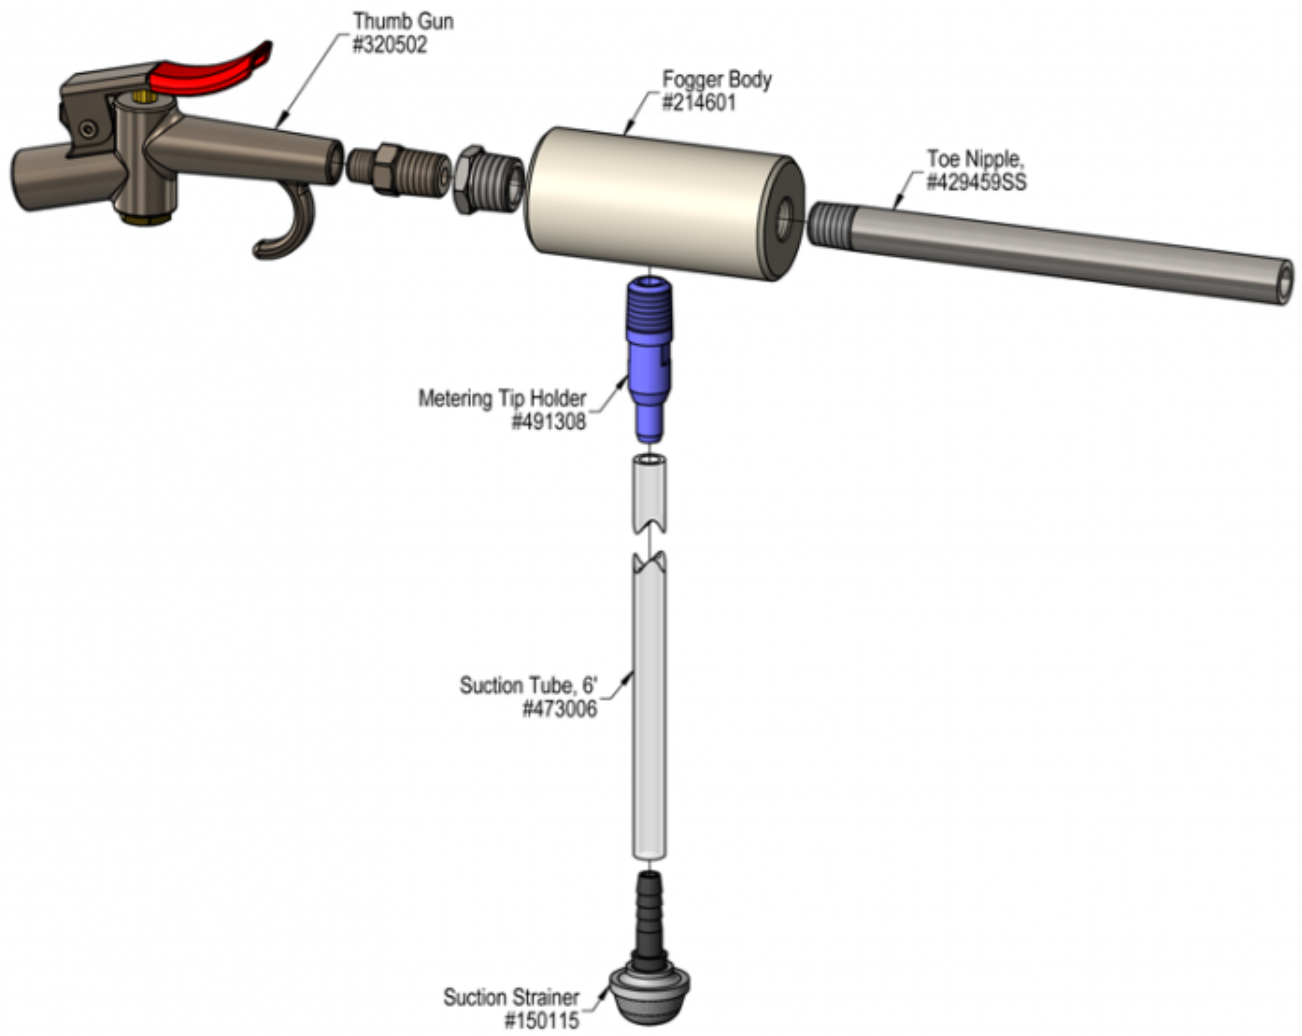

Troubleshooting Guide

AF 950600 • 394 Blast Fogger

Problem	Possible Cause / Solution	
	Startup	Maintenance
A) Fogger will not draw chemical or is sputtering B) Fog is too wet	1, 2, 3, 4 1, 5	6, 7, 8, 9

Possible Cause / Solution	
Startup	Maintenance
<ol style="list-style-type: none"> 1. Air line too small, not enough air pressure or volume <ul style="list-style-type: none"> ◦ See REQUIREMENTS, page 1. 2. Air pressure too high. <ul style="list-style-type: none"> ◦ Slightly close the air supply valve to lower the pressure by lowering the volume till the fogger smooths out. 3. Fogger too high to draw chemical, 12' maximum <ul style="list-style-type: none"> ◦ Raise the level of the chemical 4. Chemical tube kinked or not immersed in chemical or chemical depleted. <ul style="list-style-type: none"> ◦ Straighten tube / replenish chemical 5. Drawing too much solution <ul style="list-style-type: none"> ◦ Order and install optional metering tip or needle valve (needle valve 4 & 8-Way only). 	<ol style="list-style-type: none"> 6. Pin hole or cut in suction tube <ul style="list-style-type: none"> ◦ Replace suction tube. 7. Chemical strainer clogged up <ul style="list-style-type: none"> ◦ Clean or replace 8. Metering tip or metering tip holder clogged <ul style="list-style-type: none"> ◦ Clean or replace metering tip and/or metering tip holder. 9. Debris clogging the fogger inlet jets <ul style="list-style-type: none"> ◦ Disconnect air supply, remove fogger bodies and visually inspect; remove debris from fogger inlet.

PREVENTIVE MAINTENANCE: When the unit will be out of service for extended periods, place chemical tube(s) in water and flush the chemical out of the unit to help prevent chemical from drying out and causing build-up. Periodically check and clean chemical strainer and replace if missing.

