

AFCO Installation & Operation Instructions

Model #AF 975297 • Portable WR-2 Foam / Rinse / Sanitize W/ SmartWand

REQUIREMENTS

Chemical Concentrate

Water

Temperature	up to 160°F
Pressure	35 - 125 PSI
Flow	4.0 GPM @ 40 PSI
Supply Line	1/2"

Hose

Foam	1/2" x 50'
Rinse	1/2" x 50'
Sanitize	1/2" x 50'

Nozzle

Foam	SmartWand
Rinse	SmartWand
Sanitize	SmartWand

OPTIONS

5 Gallon Pail

Pail, 5 Gallon Round W/ Suction Stem	# 709105
--------------------------------------	----------

Lid & Suction Hose for 1 & 5 Gallon Pails

Pail Lid Suction Hose Assembly	# 709101
--------------------------------	----------

Square Jug Rack Conversion

Specify Round or Square Jug Racks at time of order

Alternate Check Valve - EPDM Standard

Check Valve, Chemical, PP/Viton, 1/4"	# 491315
---------------------------------------	----------



<http://www.afcocare.com>

**READ ALL
INSTRUCTIONS BEFORE
USING EQUIPMENT!**

Overview

The Portable WR-2 Foam/Rinse/Sanitize System is a combination medium volume airless foam/rinse/sanitizer applicator featuring the unique all-in-one SmartWand™. Featuring an all stainless steel cart assembly, this venturi injection system uses standard city water pressure (35 - 125 PSI) to draw and blend chemical concentrate into the water stream to create an accurately diluted solution. The foaming solution then flows through the discharge hose and the SmartWand™ which draws in atmospheric air to create and project wet, clinging foam on to any surface up close or at distances up to 6 feet. Simply open the appropriate ball valve and rotate the SmartWand™ to use the fan pattern spray setting to apply sanitizer or to rinse at full pressure.



Safety & Operational Precautions

- When connecting to a potable water supply follow all local codes for backflow prevention.
- For proper performance do NOT modify, substitute nozzle, hose diameter or length.
- Manufacturer assumes no liability for the use or misuse of this unit.
- Wear protective clothing, gloves and eye wear when working with chemicals.
- Always direct the discharge away from people and electrical devices.
- For pressures over 100 PSI, remove the discharge valve or lower pressure.
- Never leave inlet ball valves on when unit is not in use.
- Follow the chemical manufacturer's safe handling instructions.
- NEVER mix chemicals without first consulting chemical manufacturer.

TO INSTALL (REFER TO DIAGRAM, NEXT PAGE.)

1. Place a container of chemical concentrate in the jug rack(s).
2. Connect water supply. To prevent blocking the small water jets in the injector body flush any new plumbing of debris before connecting.

Set the chemical dilution ratio by threading one of the color coded metering tips into each chemical check valve. See chemical labels for dilution ratio recommendation or consult your chemical supplier.

- For the strongest dilution ratio do NOT install a colored metering tip.
- The dilution ratios in the metering tip chart are based on water thin chemicals with a viscosity of 1CPS.
- **Thicker chemicals will require a larger tip than the ratios shown in the chart.**
- Application results will ultimately determine final tip color.
- Select the tip color that is closest to your desired chemical strength and thread it into the tip holder. DO NOT OVER TIGHTEN.
- Push the chemical tube over the check valve barb and place the strainer in the chemical concentrate.

TO OPERATE

Always make sure the discharge ball valve is closed or pointed in a safe direction before turning inlet valve on. Discharge valve can be shut off at any time during operation but should not be left off for long periods of time with the inlet valve on.

OPEN ONLY ONE INLET BALL VALVE AT A TIME

TO FOAM

1. Make sure all inlet and the discharge ball valves are closed.
2. Open the foam ball valve, rotate the SmartWand with the hole in the side of the SmartWand pointing upward and open the ball valve to begin foaming. (The SmartWand will now remain in foaming mode until the ball valve is closed)
3. When finished foaming, close the discharge ball valve then close the foam ball valve.

TO RINSE

1. Open rinse ball valve, rotate the SmartWand with the hole in the side pointing down. Open the discharge ball valve to rinse.
2. When finished rinsing close the discharge ball valve then close the rinse ball valve.
3. If this is the final rinse, briefly re-open the discharge ball valve to relieve pressure in hose.

TO SANITIZE

1. Open sanitize ball valve and rotate the SmartWand so that the hole in the side of it points down.
2. Open the discharge ball valve to sanitize. When sanitizing is finished, close the discharge and sanitize ball valves.
3. Briefly reopen the discharge ball valve to relieve pressure in the hose. Always close all ball valves after use.

Metering Tip Selection Chart

Metering Tip Color	Oz. per Min.	Example: Dilution Ratio @ 40 PSI		
		Foam	Rinse	Sanitize
Brown	.56	306:1	—	526:1
Clear	.88	195:1	—	335:1
Bright Purple	1.38	124:1	—	213:1
White	2.15	80:1	—	137:1
Pink	2.93	59:1	—	100:1
Corn Yellow	3.84	45:1	—	77:1
Dark Green	4.88	35:1	—	60:1
Orange	5.77	30:1	—	51:1
Gray	6.01	29:1	—	49:1
Light Green	7.01	24:1	—	42:1
Med. Green	8.06	21:1	—	37:1
Clear Pink	9.43	18:1	—	31:1
Yellow Green	11.50	15:1	—	26:1
Burgundy	11.93	14:1	—	25:1
Pale Pink	13.87	12:1	—	21:1
Light Blue	15.14	11:1	—	19:1
Dark Purple	17.88	10:1	—	16:1
Navy Blue	25.36	7:1	—	12:1
Clear Aqua	28.60	—	—	10:1
Black	50.00	—	—	—
No Tip Ratio Up To:		6.0:1	—	7.0:1


The dilution ratios above are approximate values. Due to chemical viscosity, actual dilution ratios may vary.

Metering Tip Selection Formula

$$\frac{(\text{GPM} \times 128)}{\text{Dilution Ratio}} = \text{Oz. per Min}$$

Flow Rate Chart

Pressure PSI	Water Flow GPM		
	Foam	Rinse	Sanitize
40	1.34	4.00	2.30
50	1.50	4.47	2.57
60	1.64	4.90	2.82
70	1.77	5.29	3.04
80	1.90	5.66	3.25
90	2.01	6.00	3.45
100	2.12	6.32	3.64
110	2.22	6.63	3.81
120	2.32	6.93	3.98

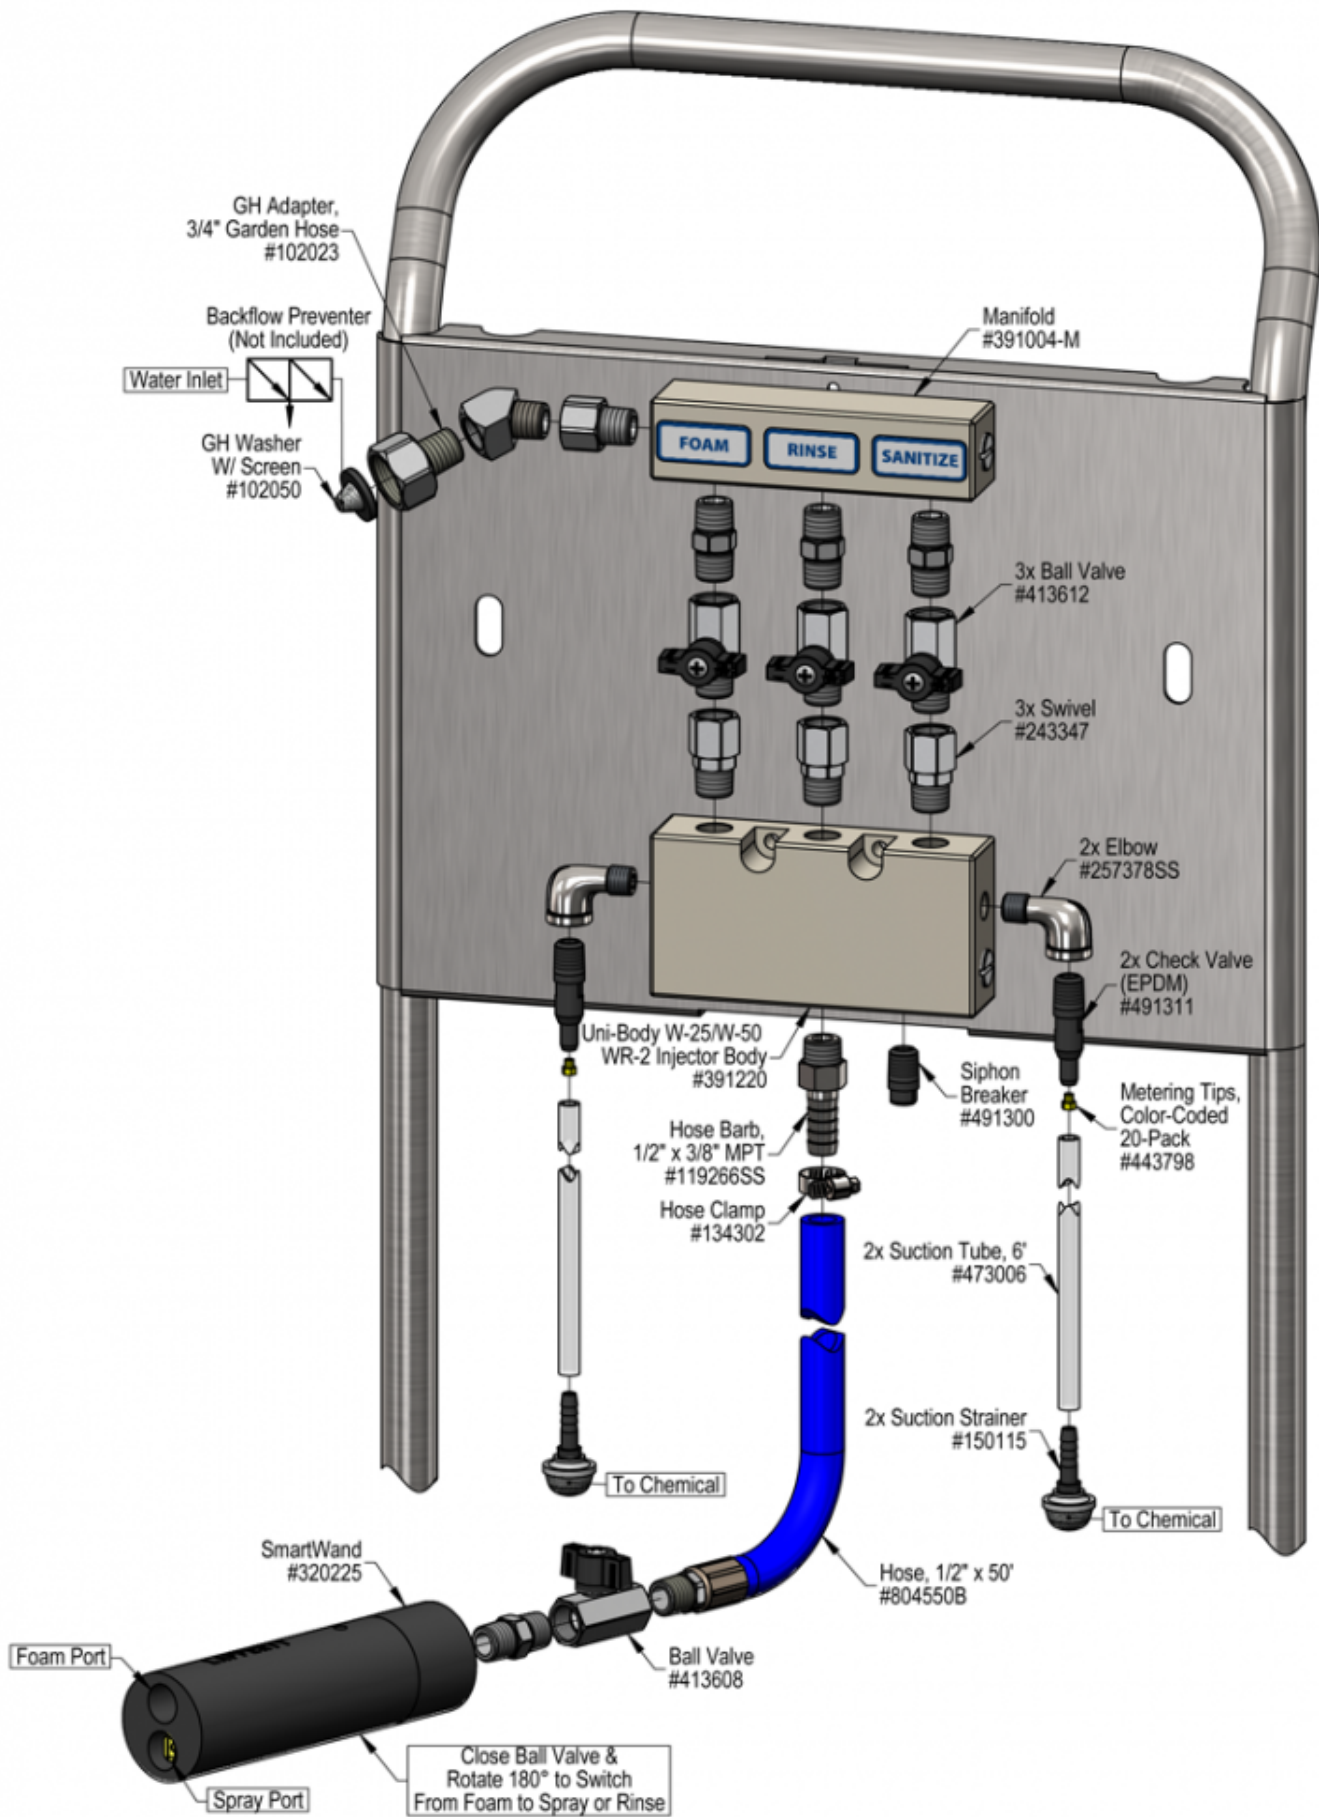

Troubleshooting Guide

AF 975297 • Portable WR-2 Foam / Rinse / Sanitize W/ SmartWand

Problem	Possible Cause / Solution	
	Startup	Maintenance
A) Unit will not draw chemical.	1, 2, 3, 4, 5	9, 11, 12, 13, 14, 15, 16
B) Using too much chemical.	7	
C) Foam/spray does not clean / perform.	6, 8	12, 13, 14, 16
D) Water back flowing into chemical		9
E) Solution backing up into water line.		10
F) Smart Wand won't switch from foam to spray		17

Possible Cause / Solution	
Startup	Maintenance
<ol style="list-style-type: none"> 1. 1. Water pressure too low <ul style="list-style-type: none"> ◦ Increase water pressure (35 psi minimum). 2. Water ball valve or discharge ball valve not completely open <ul style="list-style-type: none"> ◦ Completely open the valves. ◦ (2-Way units make sure one chemical ball valve is open) 3. More than one inlet ball valve is open <ul style="list-style-type: none"> ◦ Open only one inlet ball valve at a time. 4. Discharge too long or kinked <ul style="list-style-type: none"> ◦ Straighten hose. 5. Chemical tube not immersed in chemical or chemical depleted <ul style="list-style-type: none"> ◦ Immerse or replenish chemical 6. Improper chemical <ul style="list-style-type: none"> ◦ Ensure product is recommended for foaming and/or the application. 7. Dilution too strong even with smallest metering tip <ul style="list-style-type: none"> ◦ Some weak dilutions at lower water pressures are impossible to achieve with a single metering tip. Pre-dilute your chemical until desired dilution ratio is achieved. Or order 491307-1/4" Inline Dual Metering Tip Holder. 8. Dilution too weak <ul style="list-style-type: none"> ◦ Install larger metering tip. 	<ol style="list-style-type: none"> 9. Chemical check valve stuck or clogged <ul style="list-style-type: none"> ◦ Clean or replace. 10. No backflow preventer installed <ul style="list-style-type: none"> ◦ Install appropriate backflow preventer onto water line. 11. SmartWand screen blocked <ul style="list-style-type: none"> ◦ Dried chemical build-up may be obstructing flow through the screen. Remove fittings and soak the entire SmartWand in de-scaling acid. 12. Metering tip blocked <ul style="list-style-type: none"> ◦ Clean or replace metering tip. 13. Chemical tube stretched out where tube slides over check valve or pin hole/cut in chemical tube (sucking air in) <ul style="list-style-type: none"> ◦ Cut off end of tube or replace tube. 14. Vacuum leak in chemical pick-up connection <ul style="list-style-type: none"> ◦ Tighten the connection. 15. Water inlet strainer screen clogged <ul style="list-style-type: none"> ◦ Clean screen or replace. 16. Chemical build-up or scale may have formed in the body causing poor or no chemical pick-up <ul style="list-style-type: none"> ◦ Remove fittings and soak entire body in de-scaling acid. Replace fittings being careful not to cross thread or over tighten. 17. Smart Wand jammed <ul style="list-style-type: none"> ◦ Tap the wand against a hard surface to dislodge internal ball. If that fails soak the wand in descaling solution. ◦ Carefully remove the 2 screws in the end and remove the cap. Dislodge ball, make sure o-ring is in place and replace screws do not over tighten.

PREVENTIVE MAINTENANCE: When the unit will be out of service for extended periods, place chemical tube(s) in water and flush the chemical out of the unit to help prevent chemical from drying out and causing build-up. Periodically check and clean chemical strainer and replace if missing.

