

AFCO Installation & Operation Instructions

Model #AF 925005 • Pump Up Foamer Pro, 3 Gallon

REQUIREMENTS

RTU Chemical Solution

Temperature	up to 120° F
Pressure	up to 45 PSI

OPTIONS

Repair Kit

O Ring & Seal Repair Kit (Viton)	# 709040
O Ring & Seal Repair Kit (EPDM)	# 709040-E

Proportioning / Filling Options

1-Way Ball Valve Mixing Station (4 GPM)	# 985100
1-Way Push Lever Mixing Station (4 GPM)	# 981100

WEIGHT & DIMENSIONS

Shipping Weight: 10 lbs.

Shipping Dimensions: 11" x 11" x 25"



<http://www.afcocare.com>

**READ ALL
INSTRUCTIONS BEFORE
USING EQUIPMENT!**

Overview

The 3 Gallon Pump-Up Foamer Pro is a portable foam applicator for applying foaming chemicals to any surface as high-quality, rich, clinging foam. This professional model projects foam in a wide fan pattern for quick, but still precise, foam coverage. The 3 Gallon Pump-Up Foamer Pro features a heavy-duty hose, trigger gun, and extension wand and combines the many advantages of foam cleaning with the familiar ease and portability of a typical pump-up sprayer. If compressed air is available, use the "quick charge" valve to eliminate pumping!

AFCO • 5000 Letterkenny Rd • Chambersburg, PA. 17201 • 1-800-345-1329



Safety & Operational Precautions

- Manufacturer assumes no liability for the use or misuse of this unit.
- Wear protective clothing, gloves and eye wear when working with chemicals.
- Always direct the discharge away from electrical devices and people/animals (as appropriate)
- Follow the chemical manufacturer's safe handling instructions.

SPECIAL PRECAUTIONS

- This high density polyethylene unit is fitted with Viton seals. Chemicals not compatible with polyethylene or Viton should not be used. (EPDM seals are available for separate purchase.)
- Do not alter pressure relief valve or plug valve hole.
- Regularly lubricate pressure relief valve with a non-water soluble grease (such as petroleum jelly) and ensure proper operation, using water in the tank, prior to each use. Regular lubrication of cap seal and threads with a non-water soluble grease (petroleum jelly) will help ensure proper sealing of cap.
- Do not lift or carry by the hose or trigger gun. Securely tighten pump: loose pump can be forcibly ejected.
- Do not use with flammable or acetone based chemicals. Do not use hot liquids.
- Do not exceed 45 psi pressure and do not inflate without liquid in the tank
- Do not fill over the maximum fill mark. Relieving pressure in an overfill condition can cause harmful venting of contents.
- Never stand with face or body over the top of tank when loosening pump or relieving pressure.
- After pumping, be sure the handle is in the locked down position
- On completion of operation, with the tank in the upright position, relieve pressure in the tank by pulling up on the pressure relief valve on the side of the tank.

WARNING

This unit is equipped with a built-in inflation valve and can be pressurized using an air compressor. Extra caution is required when using a compressor, as the unit will be pressurized much more rapidly than when hand-pumping. Failure to follow the following procedure could result in serious injury to the operator or others.

1. Before each use of a compressor be certain that:
 - a. The umbrella valve, located at the bottom of the cylinder, is installed and functioning properly.
 - b. The pump assembly is screwed tightly to the tank.
 - c. The pressure relief valve is functioning properly. Check by pulling up on the valve until the red stem shows. The valve stem should move freely and spring back to its original position when released. The O-ring and valve stem must be greased.
 - d. Check the hose clamp and tighten if loose.
2. Additional Precautions:
 - a. Do not stand over the pump handle while pressurizing with an air compressor or while releasing the handle from the locked position. Compressed air can cause the pump handle to pop up upward if the valve cone or umbrella valve is worn or damaged or if the pressure relief valve is not functioning.

TO PREPARE FOR USE

1. Turn the pump handle or lid counterclockwise to remove pump and lid.
2. Add water and foaming chemical to the tank. You will have to experiment with each chemical to see how much of the concentrate you will need to add to the water to create foam. Not all chemicals will foam.
3. Leaving extra "air space" in the tank and less chemical will give longer foaming time between re-pressurizing. A half-full tank is ideal. **DO NOT FILL TO MAXIMUM CAPACITY.**
4. Securely tighten cap and pump for a good seal. (Regular lubrication of cap seal and threads will help ensure proper sealing and removal of cap)
5. Push the handle down and turn counterclockwise to unlock.
6. Pump the handle till resistance is felt, this will take several strokes. Continue pumping till the resistance is too hard to pump or pop-off valve starts to rise. Make CERTAIN the handle is in the locked down position


NOTE: It is a good idea to thoroughly rinse out the tank, fill with water, partially re-pressurize, and discharge to flush out the entire hose/nozzle assembly after use and before storing foamer. When using aggressive or corrosive chemicals never leave chemical solution in the tank after use.

TO OPERATE

1. Pump foamer up till the pressure relief valve starts to rise/relieve.
2. Pull the trigger to start and stop foaming. Re-pump up as foam begins to slow down.
3. On completion of foaming operation, with the tank in the upright position, **relieve pressure** in the tank by pulling up on the pressure relief valve on the side of the tank.
4. Prior to every refill of the tank pull up on relief valve to ensure no pressure is there before removing the lid and pump.
5. To store: Partially fill the tank with fresh water and pump it up. Pull the trigger and rinse the foamer out.

NOTE: If a richer foam is desired the remove the foam nozzle and twist up and insert the brown "pad" in the nozzle. Replace nozzle.

WHEN USING AN AIR COMPRESSOR: Place pump handle in the unlocked position and pressurize slowly till the pop-off valve starts to rise. If the **pump handle** rises...DISCONTINUE PRESSURIZING! Relieve pressure by pulling up on the pressure relief valve, remove pump and check the umbrella valve for wear or damage. Do not pressurize until worn or damaged parts have been replaced and the handle does not rise during pressurization.

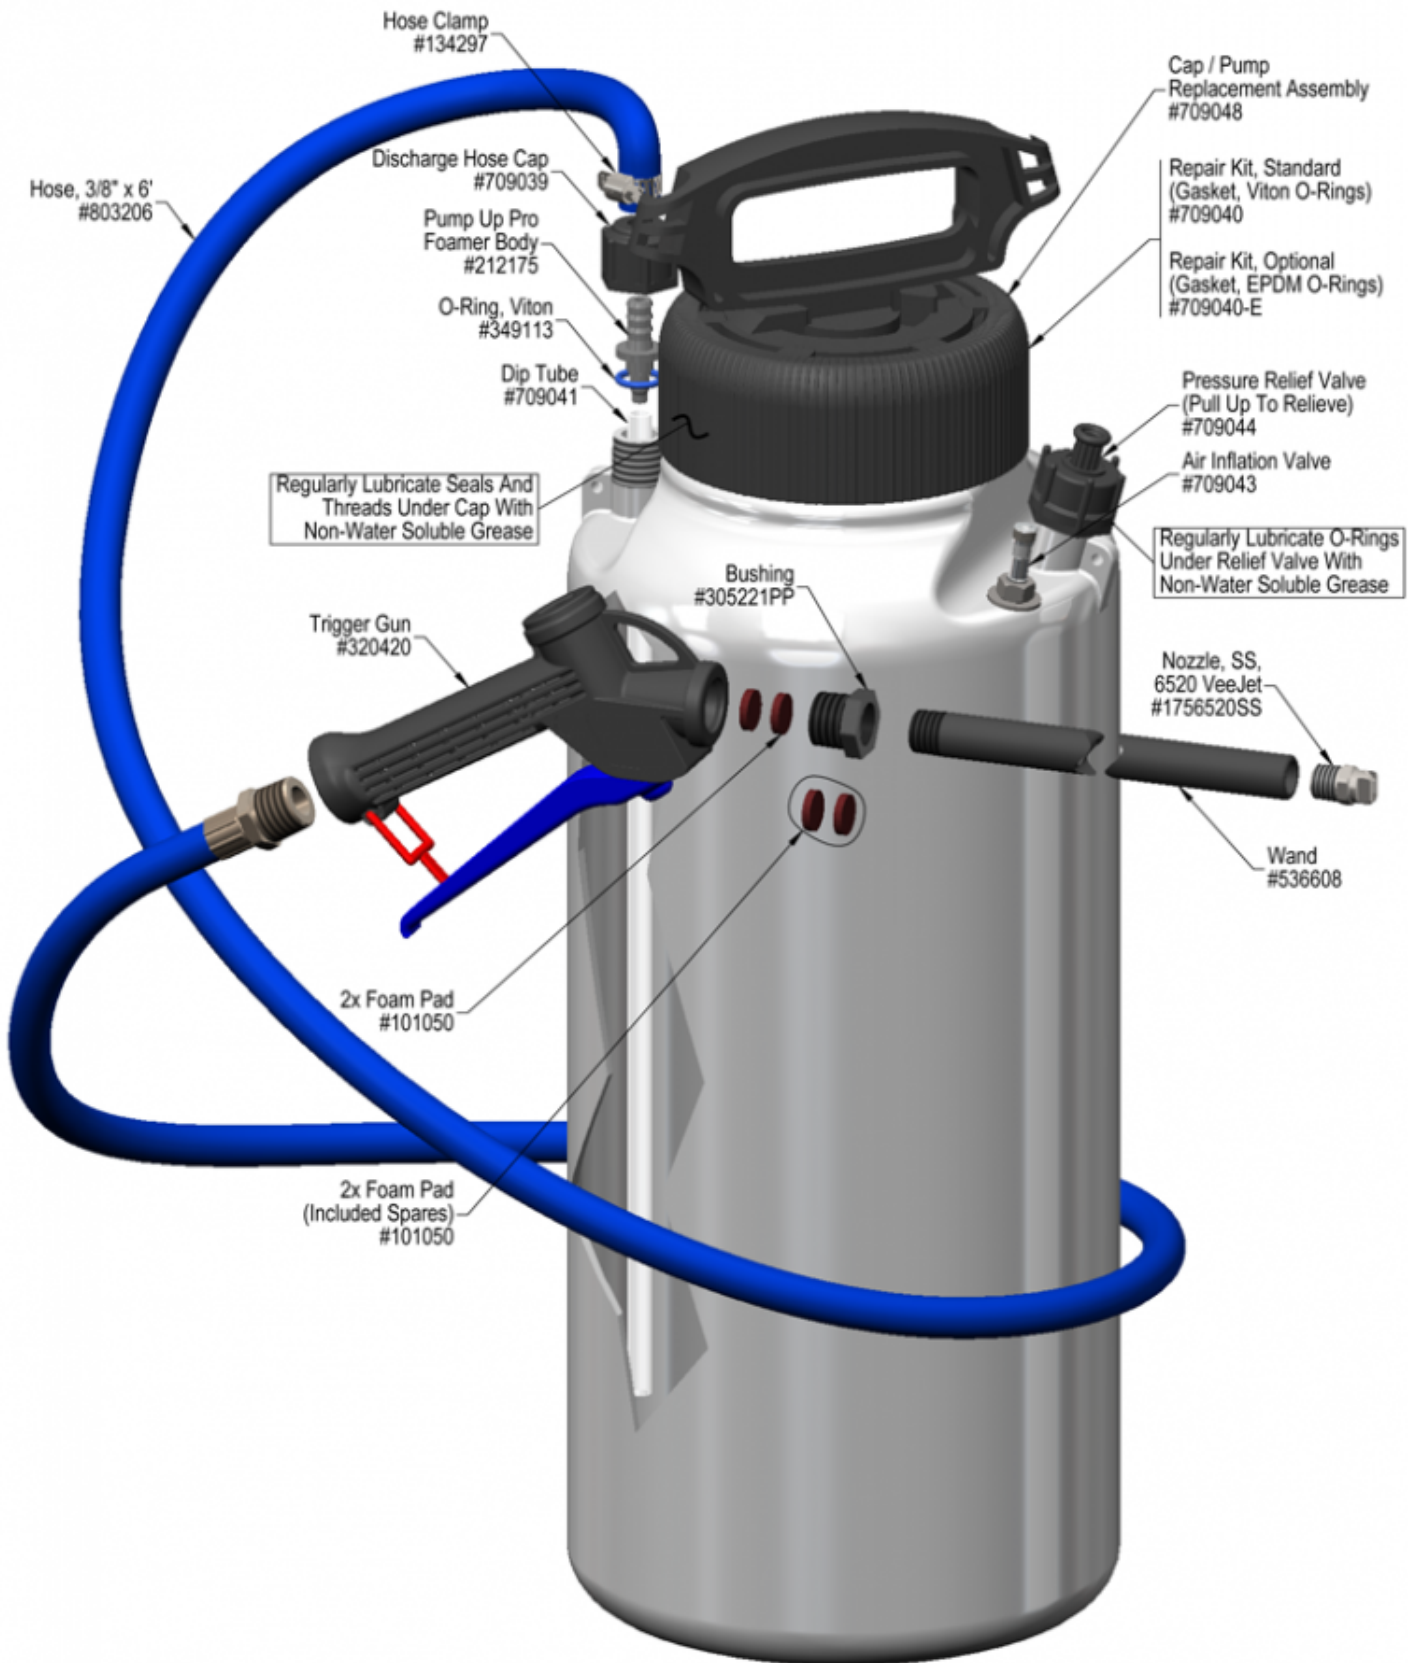

Troubleshooting Guide

AF 925005 • Pump Up Foamer Pro, 3 Gallon

Problem	Possible Cause / Solution	
	Startup	Maintenance
A) Foamer sputtering or foam not acceptable	1, 2	3, 4
B) Foam is too wet	1, 2	
C) No foam output / unit will not foam	1	3, 4
D) Tank will not pressurize		4

Possible Cause / Solution	
Startup	Maintenance
<p>1. Not enough air pressure</p> <ul style="list-style-type: none"> ◦ Pump up the foamer several strokes ◦ Less liquid in the tank will allow for more air pressure to build and foam for longer without re-pumping <p>2. Solution too weak</p> <ul style="list-style-type: none"> ◦ Increase concentration of chemical solution 	<p>3. Air leaks due to loose lid, worn or damaged components/fittings</p> <ul style="list-style-type: none"> ◦ Tighten the lid. Lubricate the lid and pressure relief O-rings. Order repair kit and replace damaged O-rings, gaskets, flapper valve etc. See page 3 for part numbers ◦ Refer to the Pump-Up O-Ring Replacement Guide http://appequip.net/uploads/documents/pump-up-o-ring-replacement.pdf ◦ To ensure chemical compatibility with the o-ring seal material, Viton or EPDM replacement kits are available. Viton is standard. <p>4. Debris clogging foamer body</p> <ul style="list-style-type: none"> ◦ Relieve air pressure by pulling up on pressure relief valve stem and remove the lid. Reach inside and pull down on the chemical tube to remove it along with the (grey) foamer body, visually inspect and remove debris from the small ports in the foamer body. Replace foamer body and tube.

PREVENTIVE MAINTENANCE: * Prior to storage, empty, clean and dry the foamer. * Lubricate O-ring in pressure relief valve and the piston/cylinder with non-water soluble grease (such as petroleum jelly) on a regular basis. * Lubricate tank cap threads and both sides of the gasket with a small amount of non-water soluble grease (such as petroleum jelly) to achieve a tight seal and to ease tightening and loosening.

