

AFCO

Installation & Operation Instructions

Model #AF 950721-TD • Portable Timed / Delay 20 Gallon 305 4-Way Fogger

REQUIREMENTS

Ready-to-Use Chemical Solution

Compressed Air 29.5 CFM @ 80PSI

Minimum Air Supply Line 1/2"

Electric 120V

OPTIONS

Optional Check Valves to Keep Tubes Primed

Check Valve, Chemical, PP(W), 1/4" (EPDM) # 491401

For Lighter Fog Use Metering Tips (4 Sets)

Metering Tips-Color Coded (10 Smallest) # 443794

Proportioning / Filling Options

1-Way Ball Valve Mixing Station (4 GPM) # 985100

1-Way Push Lever Mixing Station (4 GPM) # 981100

High Volume Mixing Station (9.9 GPM) # 985835

WEIGHT & DIMENSIONS

Shipping Weight: 74 lbs.

Shipping Dimensions: 48" x 26" x 24"



<http://www.afcocare.com>

**READ ALL
INSTRUCTIONS BEFORE
USING EQUIPMENT!**

Overview

The Portable Timed/Delay 20 Gallon 305 4-Way Fogger is a chemical atomizer that uses compressed air (29.5 CFM @ 80 PSI) and venturi action to draw ready-to-use chemical solution from the tank on the all stainless steel cart. It atomizes the solution and projects it as light, "damp" fog particles in 4 directions up to 25 feet. This unit features a telescoping mast and can also be used as a 2-Way fogger. An adjustable delay timer (up to 6 hours) allows the unit to be set to fog at a later time, and an adjustable run timer controls the length of time the unit will be fogging (up to 60 minutes).

AFCO • 5000 Letterkenny Rd • Chambersburg, PA. 17201 • 1-800-345-1329



Safety & Operational Precautions

- Manufacturer assumes no liability for the use or misuse of this unit.
- Wear proper respiratory protection, protective clothing, gloves and eye-wear when working with chemicals.
- Always direct the discharge away from electrical devices.
- Follow the chemical manufacturer's safe handling instructions.
- For proper performance do NOT modify electrical control box.
- Always consider electrical shock hazard when working with and handling electrical equipment. If uncertain, consult an Electrician. Electrical wiring should only be done by a qualified Electrician, per Local and State Electrical Codes.
- Disconnect electrical power to the control box prior to opening it.
- Remove any packing material from inside the control box before operating.
- **SPECIAL CAUTION: This fogger atomizes chemical into the air. Ensure that the area to be fogged has been evacuated of all people without proper respiratory protection!**

TO PREPARE FOR USE

1. Unpack and connect the 4-way fogger head to the nipples as shown in the drawing
2. 4- pick up tube ends are sticking out of the tank lid, push them over the 4 blue metering tip holders. Make sure to place the same tube on the 2 foggers with the ball valves. This allows the unit to be used as a 2 way.
3. Use a separate container with enough water for doing some test runs to familiarize yourself with the fogger before running chemicals through it. This will help you determine the best placement for the best coverage.

SETTING THE TIMER

1. Make sure the system is not plugged in to a power source. Open the control box cover. The box contains one timer with both "Delay & Run" adjustment knobs.
Delay: This mode allows you to set the length of time you want the unit to be inactive for before fogging begins. Set the timer by turning the knob to the amount of delay time that you require. (0-6 Hours)
Run: This mode allows you to set the length of time you want the fogger to run for after the delay period has expired. Set the timer by turning the knob to the amount of run time that you require. (0-60 Minutes)
2. Close and lock the control box cover.
3. Plug the power cord into a 120 VAC power outlet. GFI recommended.

SWITCH SETTINGS (There are two lighted rocker switches on the front of the control box.)

1. The switch on the left is labeled "On/Off/Auto Ready". With the switch in the "Off" position there is no power to the unit and there are no lights illuminated. **Caution: If the switch is set to the "On" position, the green light is illuminated and the unit will automatically start fogging. This is useful when setting the unit up and running with water to adjust fog consistency. Otherwise this setting should be used with care.**
2. When the timers have been adjusted to required settings, the switch should be set to "Auto Ready". The red light illuminates and this provides power to the second switch on the right hand side of the control box.
3. The switch on the right is labeled "Auto Initiate". When you are ready to initiate the "Delay/Run" sequence, press the top of the switch to "Auto Initiate". The green light on this switch is now illuminated. The fogger is now in Delay mode and will perform according to preset times.

Note: If power is interrupted after the timers have been set, the system stops all timer operations and will need to be reset.

SETTING AND ADJUSTING FOG DENSITY

1. To test, use a separate container of water to set and adjust the fog density. Place the two pick-up tubes into the container of water.
2. Place the fogger in the center of the area to be fogged.
3. Loosen the "L"bolts on the slide brackets and raise the 4-way fogger assembly to preferred height, and tighten the bolts to secure.
4. Set the Delay Timer knob for a minimal amount of time (enough time for you to move away from the fogger) and set the Run Timer knob for about 1 minute (enough time for you to observe the fog density.)
5. Connect your 1/2" minimum air line to the fogger. Turn on your air and electricity supply.
6. Set the rocker switches on the control box as described above.
7. Move away from the fogger and observe the fogger's performance. **The fog should be consistent and uniform. If it is sputtering and inconsistent you may need to partially close your airline ball valve to fine tune the air volume/pressure. Best results are achieved at around 60 PSI.**
8. Depending on the application, you will have to experiment with the amount of time and solution required to achieve the desired result.
9. If fog is more dense than the application requires, optional metering tips are available for restricting the solution volume to produce a lighter fog.
10. Once you are familiar with coverage, operation and air flow adjustments you are ready to fog.

TO OPERATE

SPECIAL CAUTION: This fogger atomizes chemical into the air. Ensure that the chemical is safe to be around or the area to be fogged has been evacuated of all people and/or animals before starting fogging. Upon completion of fogging, ensure that sufficient time has elapsed for all the fog to have dissipated before returning to the area without proper respiratory protection.

1. Fill the 20 gallon tank with the desired amount of ready to use solution you want to "fog" and place the tubes in the chemical solution.
2. Place the fogger in the center of the area to be fogged.
3. Loosen the "L"bolts on the slide brackets and raise the 4-way fogger assembly to preferred height, and tighten the bolts to secure.
4. Set the timers to the desired Delay and Run times (see above).
5. Connect your 1/2" minimum air line to the fogger. Turn on your air and electricity supplies. Set the rocker switches as described above.
6. Turn air supply off when finished. Do NOT re enter room without proper respiratory protection until fog dissipates.

**Portable 4-Way
305 Fogger**
Produce medium fog
particles and project a
lighter, "damp" mist up to
25 feet.

COMPRESSED AIR FLOW IN CFM


MODEL	60 PSI	80 PSI
4 -WAY	22.5	29.5

CHEMICAL SOLUTION DRAW RATE

Average ounces of chemical solution per
minute the fogger will draw

Mounted:

80" ABOVE CHEM	31.6	39.5
65" ABOVE CHEM	37.4	44.2

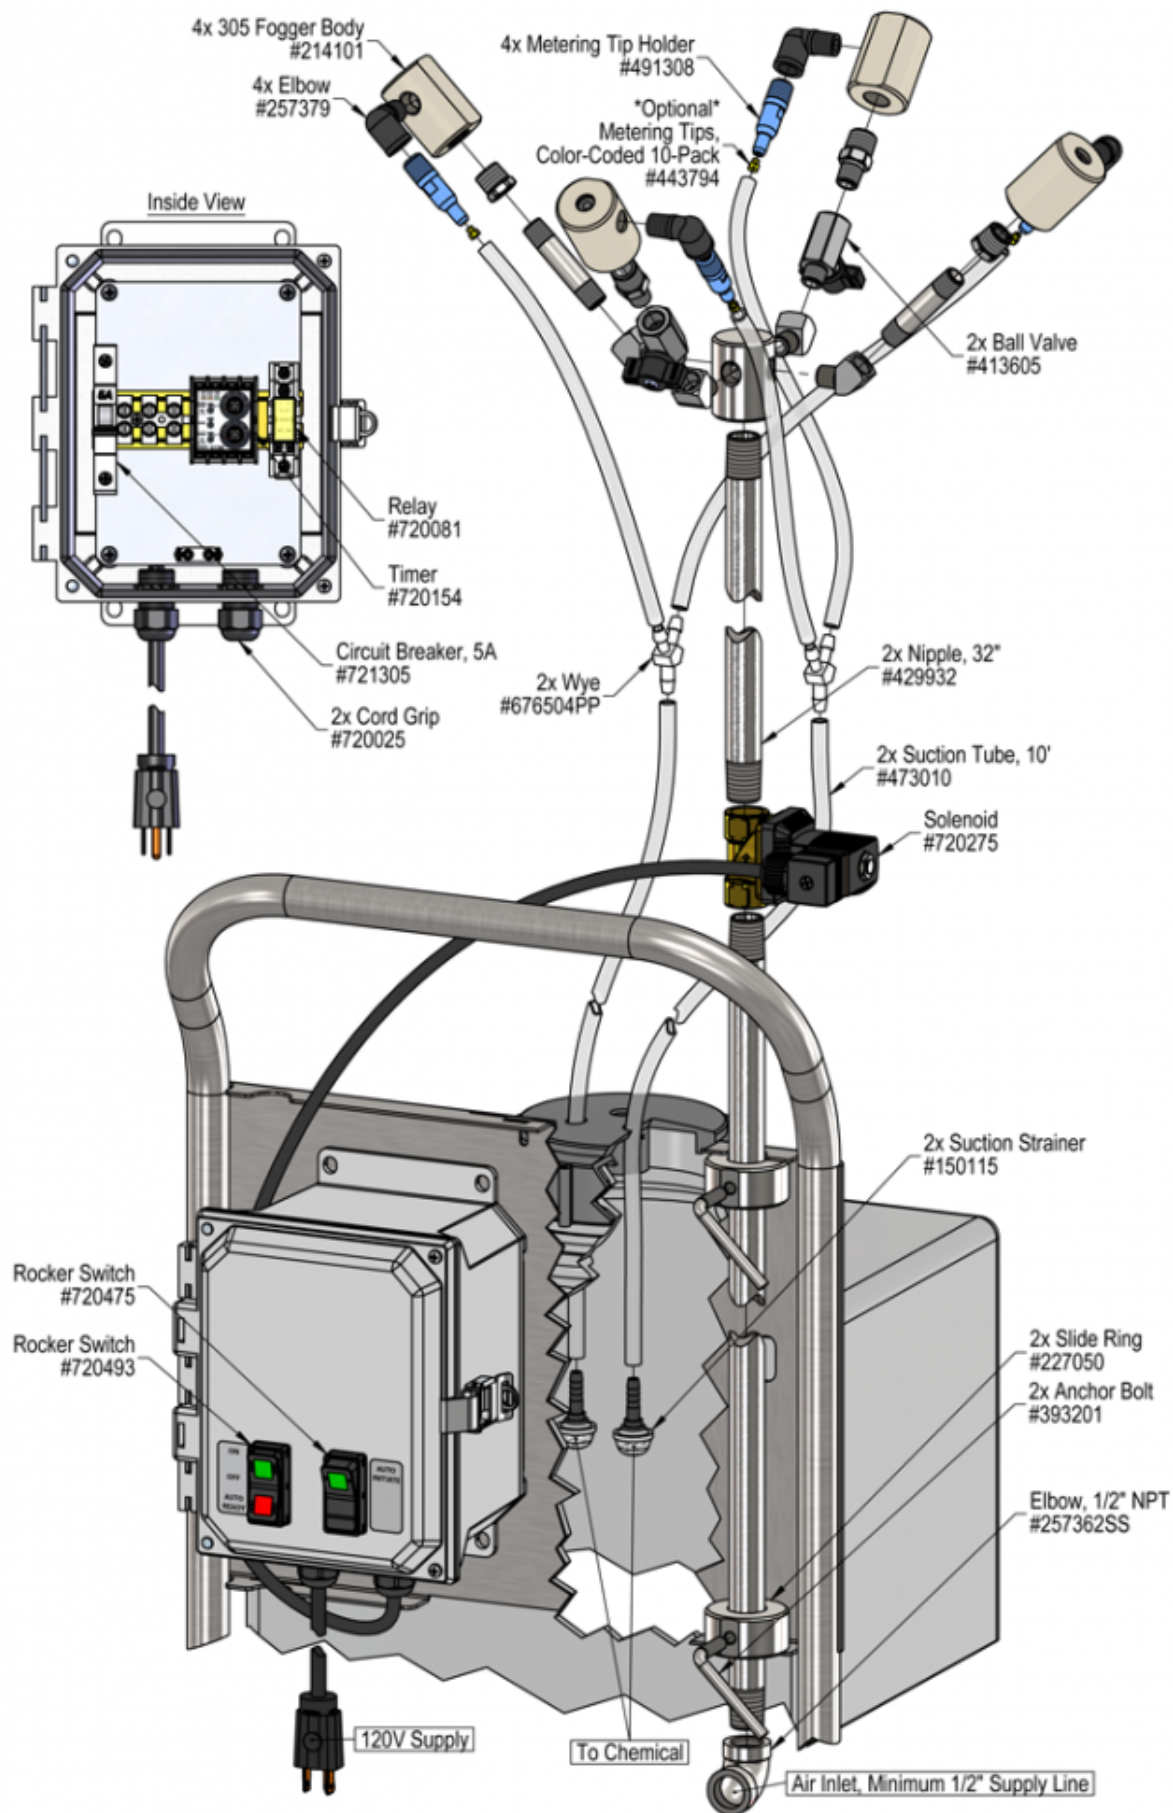

Troubleshooting Guide

AF 950721-TD • Portable Timed / Delay 20 Gallon 305 4-Way Fogger

Problem	Possible Cause / Solution	
	Startup	Maintenance
A) Fogger will not draw chemical or is sputtering	1, 2, 3, 4	8, 9, 10, 11
B) Fog is too wet	1, 5	
C) Doesn't come on when switch is turned on.	6, 7	
D) Comes on and runs continuously.	6	

Possible Cause / Solution	
Startup	Maintenance
<ol style="list-style-type: none"> Air line too small, not enough air pressure or volume <ul style="list-style-type: none"> See REQUIREMENTS, page 1. Air pressure too high. <ul style="list-style-type: none"> Slightly close the air supply valve to lower the pressure by lowering the volume till the fogger smooths out. Fogger too high to draw chemical, 12' maximum <ul style="list-style-type: none"> Raise the level of the chemical Chemical tube kinked or not immersed in chemical or chemical depleted. <ul style="list-style-type: none"> Straighten tube / replenish chemical Drawing too much solution <ul style="list-style-type: none"> Order and install optional metering tip or needle valve (4 & 8 Way only). Timer failed <ul style="list-style-type: none"> Replace timer. May have electrical problems <ul style="list-style-type: none"> Ensure circuit breaker (5 Amp) has not been tripped. Have a qualified electrician check electrical connections. 	<ol style="list-style-type: none"> Pin hole or cut in suction tube <ul style="list-style-type: none"> Replace suction tube. Chemical strainer clogged up <ul style="list-style-type: none"> Clean or replace Metering tip or metering tip holder clogged <ul style="list-style-type: none"> Clean or replace metering tip and/or metering tip holder. Debris clogging the fogger inlet jets <ul style="list-style-type: none"> Disconnect air supply, remove fogger bodies and visually inspect; remove debris from fogger inlet.

PREVENTIVE MAINTENANCE: When the unit will be out of service for extended periods, place chemical tube(s) in water and flush the chemical out of the unit to help prevent chemical from drying out and causing build-up. Periodically check and clean chemical strainer and replace if missing.

