

AFCO Installation & Operation Instructions

Model #AF 973945 • Portable 5 Gallon 517 Sanitizer

REQUIREMENTS

Chemical Concentrate

| | |
|--------------|------------------|
| Water | |
| Temperature | up to 160°F |
| Pressure | 35 - 125 PSI |
| Flow | 5.4 GPM @ 40 PSI |
| Supply Line | 3/4" |

Hose 3/4" x 25'

Nozzle 40100

OPTIONS

5 Gallon Pail

Pail, 5 Gallon Round W/ Suction Stem # 709105

Lid & Suction Hose for 1 & 5 Gallon Pails

Pail Lid Suction Hose Assembly # 709101

Square Jug Rack Conversion

Specify Round or Square Jug Racks at time of order

Alternate Sanitizer Check Valve - Viton Standard

Check Valve, Chemical, PP/EPDM, 1/4" # 491311

WEIGHT & DIMENSIONS

Shipping Weight: 41 lbs.

Shipping Dimensions: 43" x 26" x 16"



<http://www.afcocare.com>

**READ ALL
INSTRUCTIONS BEFORE
USING EQUIPMENT!**

Overview

The Portable 5 Gallon 517 Sanitizer is a water-driven, high volume spray applicator for projecting sanitizer solutions as a heavy spray on to any surface or equipment. Featuring an all stainless steel cart assembly this unit dilutes chemical concentrate to the lean ratios required for no-rinse sanitizing in food plants. This venturi injection system uses standard city water pressure (35 - 125 PSI) to draw and blend chemical concentrate into the water stream. Precision metering tips are used to create an accurately diluted solution which is projected through the discharge hose and fan nozzle as a 5.4 GPM heavy spray for complete coverage.



Safety & Operational Precautions

- When connecting to a potable water supply follow all local codes for backflow prevention.
- For proper performance do NOT modify, substitute nozzle, hose diameter or length.
- Manufacturer assumes no liability for the use or misuse of this unit.
- Wear protective clothing, gloves and eye wear when working with chemicals.
- Always direct the discharge away from people and electrical devices.
- For pressures over 100 PSI, remove the discharge valve or lower pressure.
- Never leave inlet ball valves on when unit is not in use.
- Follow the chemical manufacturer's safe handling instructions.
- NEVER mix chemicals without first consulting chemical manufacturer.

TO INSTALL (REFER TO DIAGRAM, NEXT PAGE.)

1. Place a container of chemical concentrate in the jug rack(s).
2. Connect water supply. To prevent blocking the small water jets in the injector body flush any new plumbing of debris before connecting.

Set the chemical dilution ratio by threading one of the color coded metering tips into each chemical check valve. See chemical labels for dilution ratio recommendation or consult your chemical supplier.

- For the strongest dilution ratio do NOT install a colored metering tip.
- The dilution ratios in the metering tip chart are based on water thin chemicals with a viscosity of 1CPS.
- **Thicker chemicals will require a larger tip than the ratios shown in the chart.**
- Application results will ultimately determine final tip color.
- Select the tip color that is closest to your desired chemical strength and thread it into the tip holder. DO NOT OVER TIGHTEN.
- Push the chemical tube over the check valve barb and place the strainer in the chemical concentrate.

TO OPERATE

Always make sure the discharge ball valve is closed or pointed in a safe direction before turning water on. Ball valve can be shut off at any time during operation but should not be left unattended for long periods of time.

1. Open the inlet ball valve then open the discharge ball valve to begin application.
2. Make final metering tip adjustments based on application results.
3. When application is completed, close the discharge ball valve, return to the unit and close the inlet ball valve. Re-open the discharge ball valve to relieve pressure in hose then close the discharge ball valve. If applicable rinse the work surface before solution dries.

Metering Tip Selection Chart

| Metering Tip Color | Oz. per Min. | Example: Dilution Ratio @ 40 PSI |
|--------------------|--------------|----------------------------------|
| Brown | .56 | 1234:1 |
| Clear | .88 | 785:1 |
| Bright Purple | 1.38 | 501:1 |
| White | 2.15 | 321:1 |
| Pink | 2.93 | 236:1 |
| Corn Yellow | 3.84 | 180:1 |
| Dark Green | 4.88 | 142:1 |
| Orange | 5.77 | 120:1 |
| Gray | 6.01 | 115:1 |
| Light Green | 7.01 | 99:1 |
| Med. Green | 8.06 | 86:1 |
| Clear Pink | 9.43 | 73:1 |
| Yellow Green | 11.50 | 60:1 |
| Burgundy | 11.93 | 58:1 |
| Pale Pink | 13.87 | 50:1 |
| Light Blue | 15.14 | 46:1 |
| Dark Purple | 17.88 | 39:1 |
| Navy Blue | 25.36 | 27:1 |
| Clear Aqua | 28.60 | 24:1 |
| Black | 50.00 | 14:1 |
| No Tip Ratio | up to 11.0:1 | |


The dilution ratios above are approximate values. Due to chemical viscosity, actual dilution ratios may vary.

Metering Tip Selection Formula

$$\text{(GPM} \times 128) / \text{Dilution Ratio} = \text{Oz. per Min}$$

Flow Rate Chart

| Pressure | Flow Rate |
|----------|-----------|
| PSI | GPM |
| 40 | 5.40 |
| 50 | 6.04 |
| 60 | 6.61 |
| 70 | 7.14 |
| 80 | 7.64 |
| 90 | 8.10 |
| 100 | 8.54 |
| 110 | 8.95 |
| 120 | 9.35 |

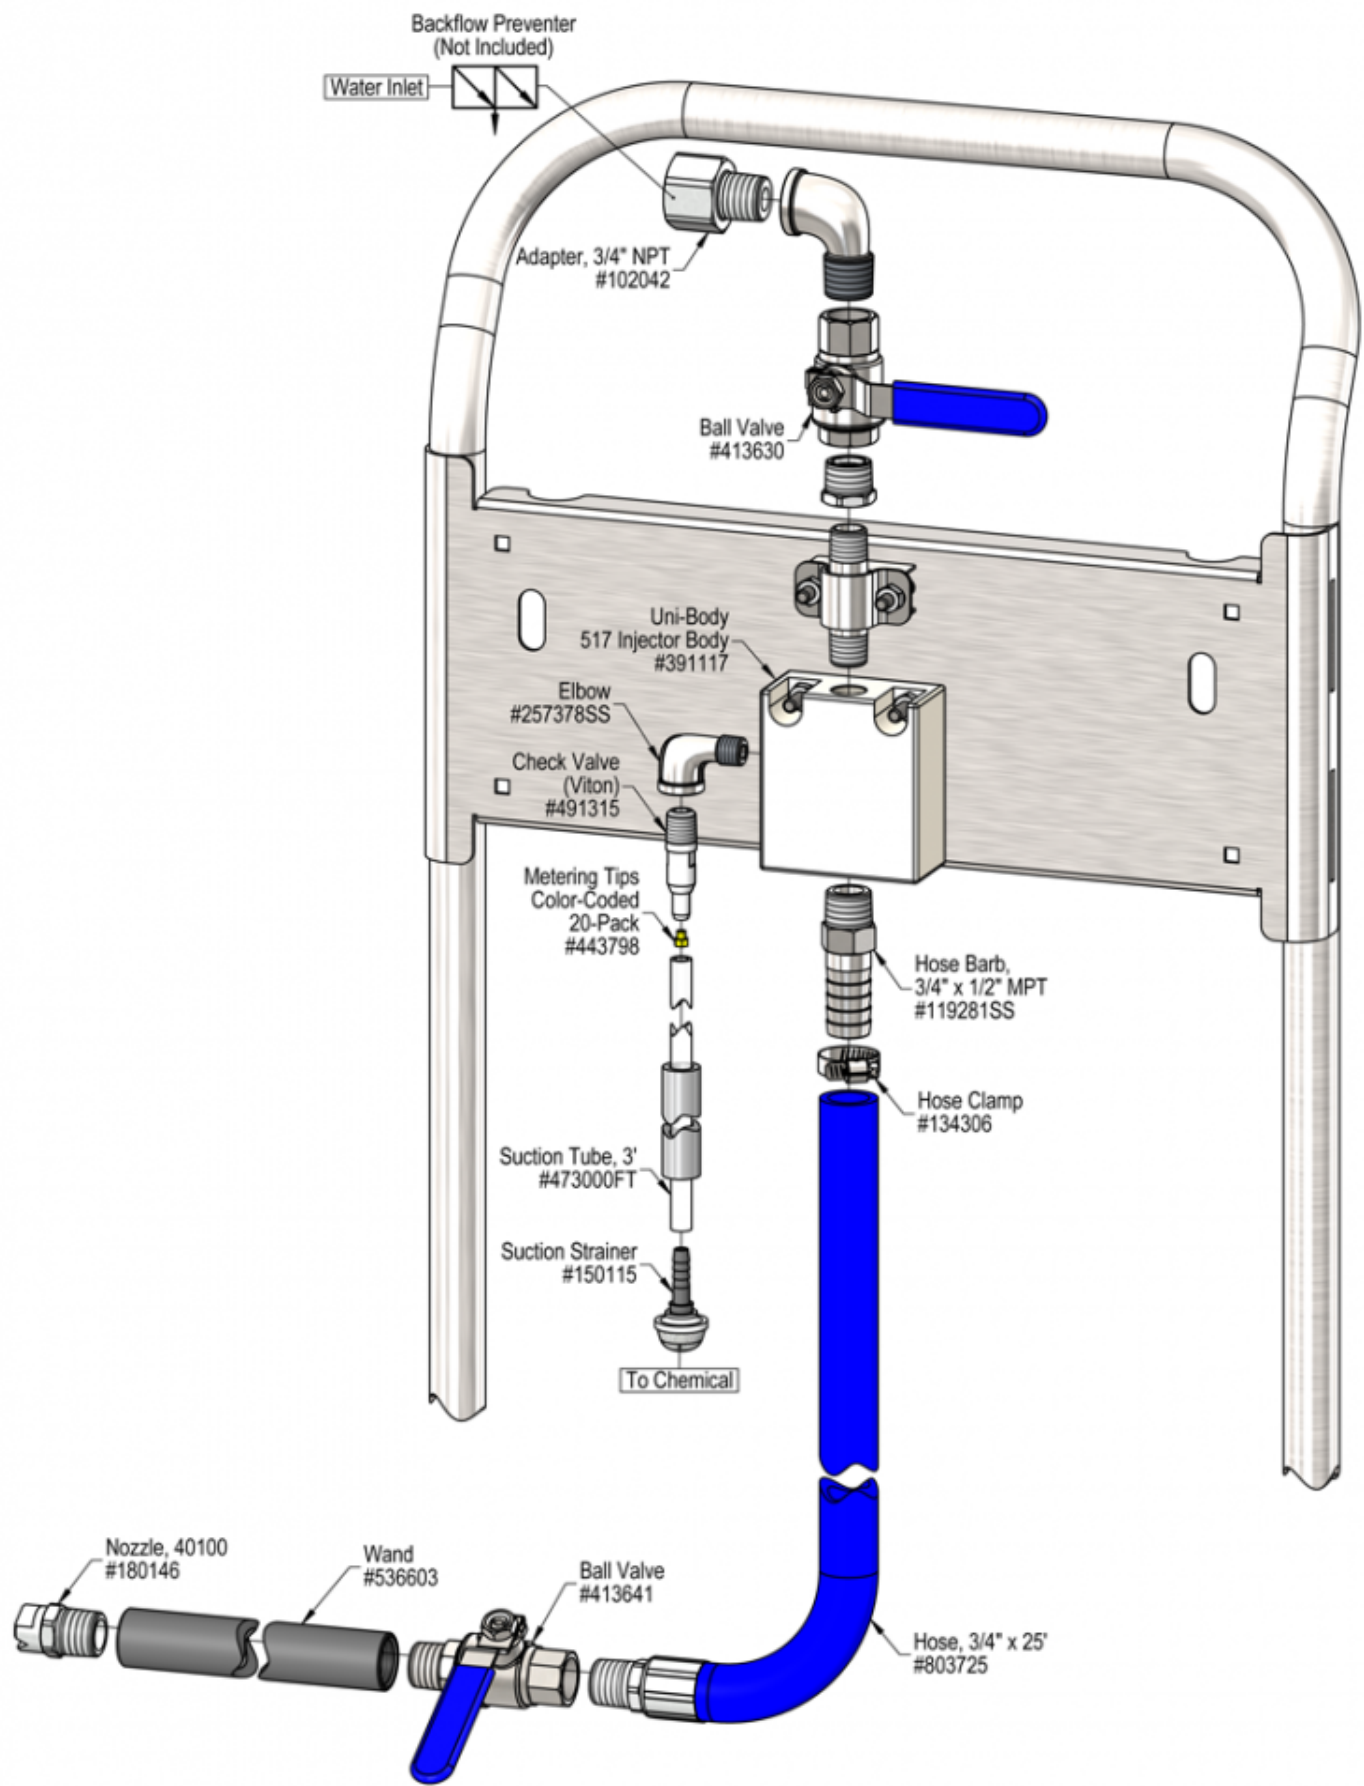

Troubleshooting Guide

AF 973945 • Portable 5 Gallon 517 Sanitizer

| Problem | Possible Cause / Solution | |
|---|---------------------------|--------------------------|
| | Startup | Maintenance |
| A) Unit will not draw chemical | 1, 4, 5, 6, 7 | 8, 9, 10, 11, 12, 13, 14 |
| B) Dilution too weak | 2, 4, 5 | 8, 9, 10, 11, 12, 13, 14 |
| C) Dilution too strong | 3 | 14 |
| D) Water backing up into chemical container | | 8 |

| Possible Cause / Solution | |
|--|---|
| Startup | Maintenance |
| <ol style="list-style-type: none"> 1. Inlet or discharge ball valves not completely open <ul style="list-style-type: none"> ◦ Completely open both ball valves. 2. Not enough chemical - metering tip too small <ul style="list-style-type: none"> ◦ Install larger metering tip. 3. No metering tip installed or metering tip too large <ul style="list-style-type: none"> ◦ Install smaller metering tip. 4. Chemical tube not immersed in chemical or chemical depleted <ul style="list-style-type: none"> ◦ Immerse tube or replenish. 5. Discharge hose too long for available water pressure, kinked or wrong size <ul style="list-style-type: none"> ◦ Straighten the hose or replace hose. 6. Nozzle size too small (SEE REQUIREMENTS) 7. Water pressure or water volume too low/inlet piping too small causing poor chemical pick up <ul style="list-style-type: none"> ◦ Increase water pressure or water volume | <ol style="list-style-type: none"> 8. Chemical check valve stuck or failed <ul style="list-style-type: none"> ◦ Clean or replace. 9. Chemical strainer or metering tip partially blocked <ul style="list-style-type: none"> ◦ Clean or replace chemical strainer and/or metering tip. 10. Chemical tube stretched out or pin hole/cut in chemical tube <ul style="list-style-type: none"> ◦ Cut off end of tube or replace tube. 11. Vacuum leak in chemical pick-up connections <ul style="list-style-type: none"> ◦ Tighten the connection. 12. Water strainer clogged or missing/injector inlet orifice clogged <ul style="list-style-type: none"> ◦ Clean or replace strainer; check/clean inlet orifice for obstructions. DO NOT DRILL OUT. 13. Hard water scale or chemical build-up may have formed in the injector body causing poor or no chemical pick-up <ul style="list-style-type: none"> ◦ Follow Preventive Maintenance instructions below, using hot water and/or de-scaling acid. When there is no draw at all, carefully remove fittings and soak entire injector body in de-scaling acid. 14. More than one chemical ball valve is open <ul style="list-style-type: none"> ◦ 2-Way and 3-Way models only |

PREVENTIVE MAINTENANCE: When the unit will be out of service for extended periods, place chemical tube(s) in water and flush the chemical out of the unit to help prevent chemical from drying out and causing build-up. Periodically check and clean chemical strainer and replace if missing.

